



复旦微电子

FM11RF08S

8K bits Contactless Logic Security IC

Datasheet

Sep.2020

INFORMATION IN THIS DOCUMENT IS INTENDED AS A REFERENCE TO ASSIST OUR CUSTOMERS IN THE SELECTION OF SHANGHAI FUDAN MICROELECTRONICS GROUP CO., LTD PRODUCT BEST SUITED TO THE CUSTOMER'S APPLICATION AND SHANGHAI FUDAN MICROELECTRONICS GROUP CO., LTD DOES NOT GUARANTEE THE AUTHENTICITY AND INTEGRITY OF THE INFORMATION.

INFORMATION DO NOT CONVEY ANY LICENSE UNDER ANY INTELLECTUAL PROPERTY RIGHTS, OR ANY OTHER RIGHTS, BELONGING TO SHANGHAI FUDAN MICROELECTRONICS GROUP CO., LTD OR A THIRD PARTY.

WHEN USING THE INFORMATION CONTAINED IN THIS DOCUMENTS, PLEASE BE SURE TO EVALUATE ALL INFORMATION AS A TOTAL SYSTEM BEFORE MAKING A FINAL DECISION ON THE APPLICABILITY OF THE INFORMATION AND PRODUCTS.

PURCHASERS ARE SOLELY RESPONSIBLE FOR THE CHOICE, SELECTION AND USE OF THE SHANGHAI FUDAN MICROELECTRONICS GROUP CO., LTD PRODUCTS AND SERVICES DESCRIBED HEREIN, AND SHANGHAI FUDAN MICROELECTRONICS GROUP CO., LTD ASSUMES NO LIABILITY WHATSOEVER RELATING TO THE CHOICE, SELECTION OR USE OF THE SHANGHAI FUDAN MICROELECTRONICS GROUP CO., LTD PRODUCTS AND SERVICES DESCRIBED HEREIN. UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED SHANGHAI FUDAN MICROELECTRONICS GROUP CO., LTD REPRESENTATIVE, SHANGHAI FUDAN MICROELECTRONICS GROUP CO., LTD PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE.

FUTURE ROUTINE REVISIONS WILL OCCUR WHEN APPROPRIATE, WITHOUT NOTICE. CONTACT SHANGHAI FUDAN MICROELECTRONICS GROUP CO., LTD SALES OFFICE TO OBTAIN THE LATEST SPECIFICATIONS AND BEFORE PLACING YOUR PRODUCT ORDER. PLEASE ALSO PAY ATTENTION TO INFORMATION PUBLISHED BY SHANGHAI FUDAN MICROELECTRONICS GROUP CO., LTD BY VARIOUS MEANS, INCLUDING SHANGHAI FUDAN MICROELECTRONICS GROUP CO., LTD HOME PAGE ([HTTP://WWW.FMSH.COM/](http://www.fms.com/)).

PLEASE CONTACT SHANGHAI FUDAN MICROELECTRONICS GROUP CO., LTD LOCAL SALES OFFICE FOR THE SPECIFICATION REGARDING THE INFORMATION IN THIS DOCUMENT OR SHANGHAI FUDAN MICROELECTRONICS GROUP CO., LTD PRODUCTS.

Trademarks

Shanghai Fudan Microelectronics Group Co., Ltd name and logo, the “复旦” logo are trademarks or registered trademarks of Shanghai Fudan Microelectronics Group Co., Ltd or its subsidiaries in China.

Shanghai Fudan Microelectronics Group Co., Ltd, Printed in the China, All Rights Reserved.



Contents

CONTENTS	2
1 PRODUCT OVERVIEW	4
1.1 INTRODUCTION.....	4
1.2 FEATURES	4
1.2.1 RF Interface.....	4
1.2.2 EEPROM	4
1.2.3 Security	4
1.3 BLOCK DIAGRAM.....	5
1.4 PIN DESCRIPTION	5
1.4.1 Bare dies	5
1.4.2 Bare dies with bump.....	6
2 FUNCTIONAL DESCRIPTION	7
2.1 GENERAL DESCRIPTION	7
2.2 MEMORY ORGANIZATION AND ACCESS RIGHT	7
2.2.1 UID	11
2.2.2 Configuration of delivered ICs	11
2.3 TRANSACTION SEQUENCE DESCRIPTION	12
2.4 COMMAND SET	13
2.5 DATA INTEGRITY	14
2.6 SECURITY	14
3 CHARACTERISTICS	15
3.1 LIMITING VALUES.....	15
3.2 NORMAL WORKING CONDITION.....	15
3.3 ELECTRICAL CHARACTERISTICS	15
3.4 EEPROM CHARACTERISTICS	15
4 ORDERING INFORMATION	16
REVISION HISTORY	17
SALES AND SERVICE	18

1 Product Overview

1.1 Introduction

FM11RF08S (short for RF08S) is a logic security IC which based on ISO/IEC 14443A for the proximity contactless applications. It has excellent compatibility with all kinds of readers, enhanced RF performance and higher reliability of EEPROM.

Comparing with the old version chip RF08, RF08S's security and anti-crack ability have been enhanced by fixing the weak points in the realization of the algorithm without losing of the functional compatibility. The communication distance has also been enhanced keeping the merit of compatibility with all kinds of readers.

1.2 Features

1.2.1 RF Interface

- ISO/IEC 14443-A
- Contactless transmission of data and supply energy (no battery needed)
- Operating distance: up to 10cm (depending on various parameters as e.g. field strength and antenna geometry)
- Operating frequency: 13.56 MHz
- Fast communication baud rate: 106Kbit/s
- Operating distance: up to 100mm (depending on antenna geometry)
- Half duplex communication protocol using handshake
- Encryption algorithm compatible with M1 standard
- Typical transaction time: <100ms

1.2.2 EEPROM

- 1024x8 bits EEPROM memory, Organized in security separated 16 sectors supporting multi-application use
- 10 years data retention
- Write endurance of 200,000 cycles

1.2.3 Security

- UID is unchangeable.
- Mutual three pass authentication
- High security level data communication
- Each sector has two keys separately
- User can defines assess conditions for each memory block flexibly
- Security and anti-crack ability have been enhanced comparing with the old version chip

1.3 Block diagram

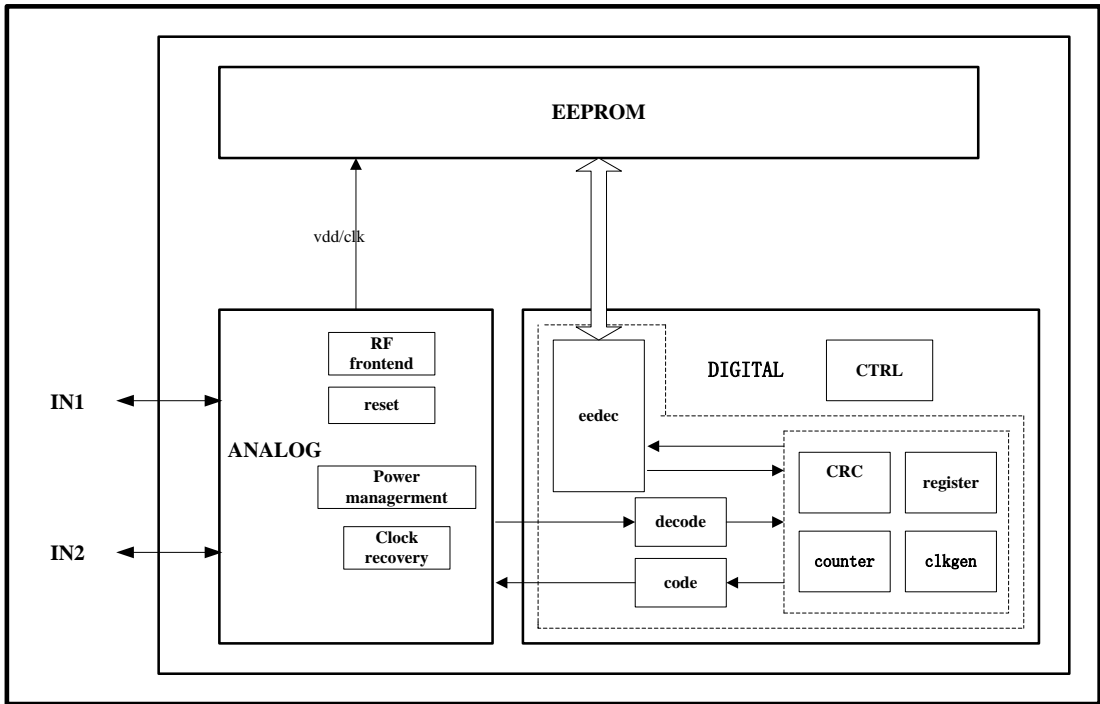


Figure 1-1 RF08S Block diagram

1.4 PIN description

Please consult Fudan Micro Electronics Company for the wafer datasheet.

1.4.1 Bare dies

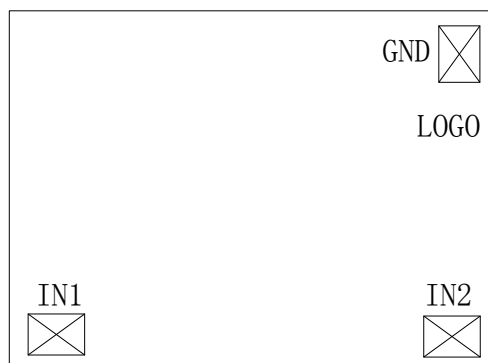


Figure 1-2 RF08S PIN description

Table 1-1 RF08S PIN description

Number	PIN name	PIN Description
1	IN1	antenna RF input
2	IN2	antenna RF input

3	GND	Ground of the chip
---	-----	--------------------

1.4.2 Bare dies with bump

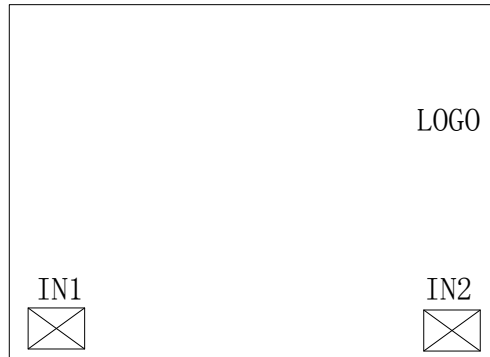


Figure 1-3 RF08S Bumping PIN description

Table 1-2 RF08S Bumping PIN description

Number	PIN name	PIN Description
1	IN1	antenna RF input
2	IN2	antenna RF input

2 Functional Description

2.1 General description

RF08S is a contactless card IC according to ISO14443 Type A which developed by Shanghai FuDan Microelectronics Co., Ltd. This device has a 1K x 8bits EEPROM.

RF08S also has a high security performance with the encryption and communication circuit, and is a true multi-application smart card with the functionality of a processor card realized with hardware logic. So RF08S can be especially tailored to meet the requirements of a payment card which can be used for ticketing systems in public transport and loyal card in consumption applications.

The Contactless smart card contains three components: RF08S chip、antenna and the card base with PVC (or PET) material. No battery is needed. When the chip is positioned in proximity of the coupling device antenna, the high speed RF communication interface allows transmitting data with 106-kbit/s.

2.2 Memory organization and Access Right

The RF08S has an 8K bits EEPROM which has 16 sectors with 4 blocks. One block consists of 16 bytes each.

The structure of memory is shown below:

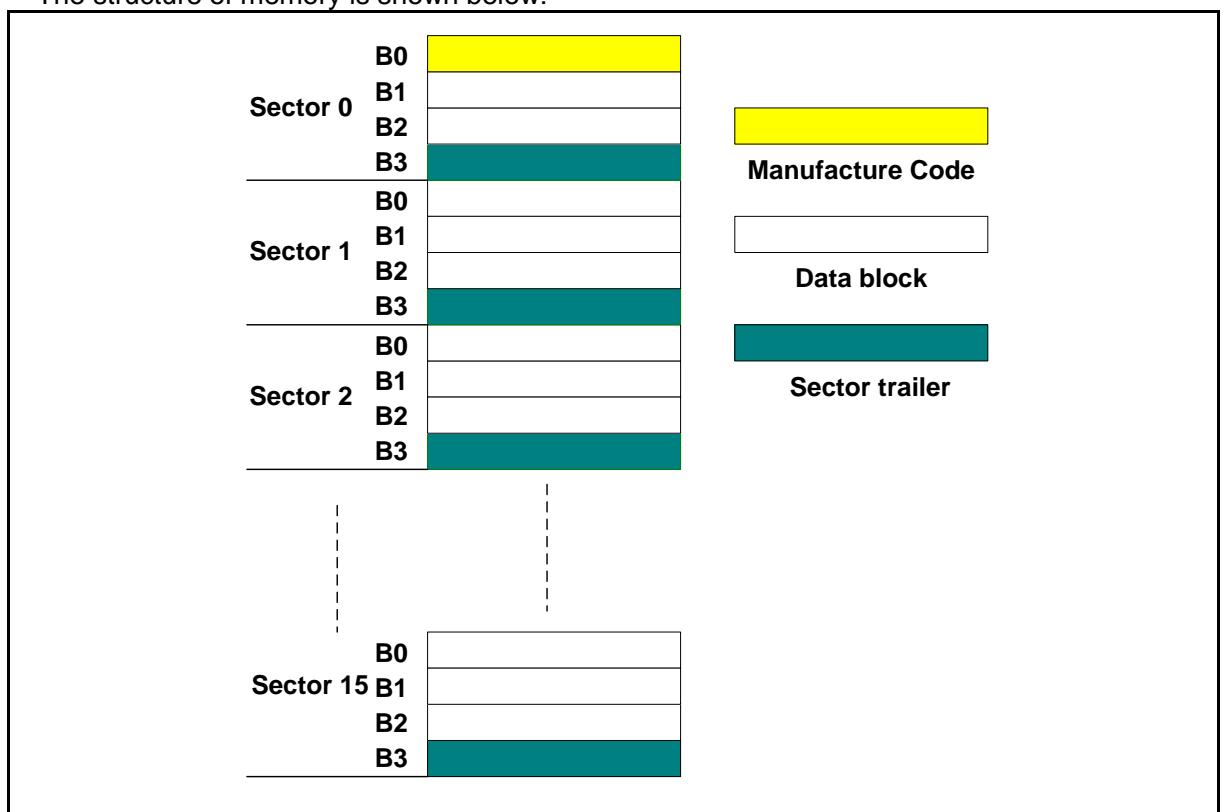


Figure 2-1 RF08S Memory Organization



The fourth block of every sector contains access KEYA (6 bytes), an optional KEYB (6 bytes) and the access conditions for the four blocks of that sector (4 bytes). The other blocks of the sector serve as common data blocks. The first block of the memory is reserved for manufacturer data. It is a read only block "block0" generally.

The structure of block3 is shown below:

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
KeyA						Access Bits					KeyB				

Figure 2-2 RF08S Structure of Block 3

Memory organization:

Bit7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
C2X3_b	C2X2_b	C2X1_b	C2X0_b	C1X3_b	C1X2_b	C1X1_b	C1X0_b
C1X3	C1X2	C1X1	C1X0	C3X3_b	C3X2_b	C3X1_b	C3X0_b
C3X3	C3X2	C3X1	C3X0	C2X3	C2X2	C2X1	C2X0
BX7	BX6	BX5	BX4	BX3	BX2	BX1	BX0

Note:

b stands for inversion e.g.:C2X3_b=INV(C2X3)

X stands for sector No.(0~15)

Y stands for block No.(0~3)

C stands for control bit

B stands for reserve bit

Access condition for the Block 3 (X=0-15)

			KEYA	KEYA	Access Con	Access Con	KEYB	KEYB
C1X3	C2X3	C3X3	read	Write	Read	Write	read	Write
0	0	0	never	KEYA B	KEYA B	Never	KEYA B	KEYA B
0	1	0	never	Never	KEYA B	Never	KEYA B	Never
1	0	0	never	KEYB	KEYA B	Never	never	KEYB
1	1	0	never	Never	KEYA B	Never	never	Never
0	0	1	Never	KEYA B	KEYA B	KEYA B	KEYA B	KEYA B
0	1	1	Never	KEYB	KEYA B	KEYB	never	KEYB
1	0	1	Never	Never	KEYA B	KEYB	never	Never
1	1	1	Never	Never	KEYA B	Never	never	Never

Note: KEY A|B means KEY A or KEY B;

Never means can't perform the function.

Access condition for Data Blocks (X=0-15 sectors, y=0-2 block of each sector)

C1XY	C2XY	C3XY	Read	Write	Increment	decr, transfer, restore
0	0	0	KEYA B	KEYA B	KEYA B	KEYA B
0	1	0	KEYA B	Never	Never	Never
1	0	0	KEYA B	KEYB	Never	Never



C1XY	C2XY	C3XY	Read	Write	Increment	decr, transfer, restore
1	1	0	KEYA B	KEYB	KEYB	KEYA B
0	0	1	KEYA B	Never	Never	KEYA B
0	1	1	KEYB	KEYB	Never	Never
1	0	1	KEYB	Never	Never	Never
1	1	1	Never	Never	Never	Never

2.2.1 UID

The chip's 4 bytes UID is placed in the sector0 block0 of the memory.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
uid0~uid3				Chip Info											

Table 2-1 UID

2.2.2 Configuration of delivered ICs

RF08S is delivered with the following configuration by Fudan Micro:

- The UID is read only
- User data memory is not defined

Sector	Block	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
0	0	UID				Chip Info											
	1	00															
	2	00															
	3	FF				FF	07	80	69	FF							
1	0	00															
	1	00															
	2	00															
	3	FF				FF	07	80	69	FF							
15	0	00															
	1	00															
	2	00															
	3	FF				FF	07	80	69	FF							

Figure 2-3 Memory configuration

2.3 Transaction Sequence Description

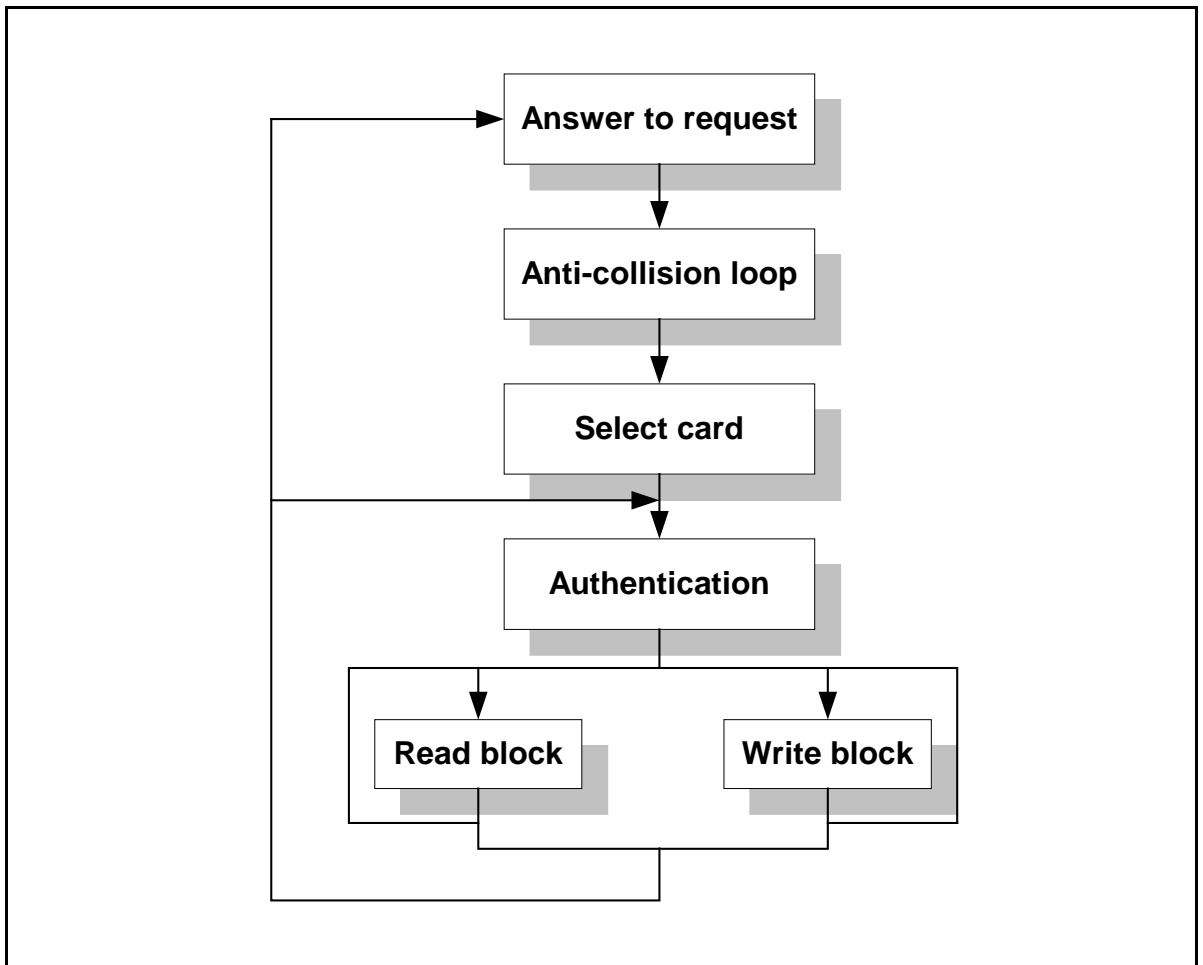


Figure 2-4 RF08S Transaction Sequence Diagram

Answer to Request: The type of a card defines the communication protocol and the communication baud rate between reader and card. When a card is in the operating range of a reader, the reader continues communication with the appropriate protocol, specified by the type of a card.

Anti-collision Loop: If there are several cards in the operating range of reader they can be distinguished by their different serial numbers and one selected for further transactions. The unselected cards return to the standby mode and wait for a new Answer to Request and Anti-collision loop.

Select Card: After selection of a card, the card returns the Answer to Select code (SAK).

3 Pass Authentication: After Selection of a card, reader specifies the memory location of the following memory access and use the corresponding key for the 3 Pass Authentication procedures. Any communication after authentication is performed via stream cipher encryption.

Read/Write:

After authentication of the following operations may be performed:

READ: Read one block

WRITE: Write one block

DECREMENT: Decrements the contents of one block and stores the result in the data-register.



Increment: Increments the contents of one block and stores the result in the data-register.

TRANSFER: Write the contents of the data-register to one block

RESTORE: Stores the contents of one block in the data-register

Halt: Pause operation

2.4 Command set

The RF08S comprises the command set as described in following chapters.

NAME	CODE(HEX)
Request std	26
Request all	52
Anti-collision	93
Select Card	93
Authentication.la	60
Authentication.lb	61
Read	30
Write	A0
Increment	C1
Decrement	C0
Restore	C2
Transfer	B0
Halt	50

Answer to Request: Look for card in operating area. 'Request Std' means looking for card which is not set to halt, 'Request All' means looking for all cards which are in operating area.

Anti-collision: It means selecting only one card if there is one card or several cards in operating area.

Select Card: It means setting up the communication with the selected card after the anti-collision command.

Authentication: Before visiting memory, the user must verify if the operation is legal by coherence of cipher in reader and cipher in card.

Read: Read 16 bytes of one block.

Write: Write data to one block.

Increment: Increment a certain value to numerical block, store the result in register.

Decrement: Decrement a certain value to numerical block, store the result in register.

Restore: Read contents of numerical block to register.

Transfer: Write contents of register to numerical block.

Halt: Card is set to halt.

2.5 Data integrity

Following mechanisms are implemented in the contactless communication link between reader and card to ensure very reliable data transmission:

- Anti-collision
- 16bit CRC per block
- Parity bits for each byte
- Bit count checking
- Bit coding to distinguish between “1”, “0”, and no information
- Channel monitoring (Protocol sequence and bit stream analysis)

2.6 Security

The RF08S card has high security: 3PASS Authentication must be get through before read/write operation. Serial Numbers, which cannot be altered, guarantee the uniqueness of each card. Crypto-Data transfer, Key Transfer and Access Key Protection.

Keys in the cards are read protected but can be altered by who knows the actual key. There are 16 sectors in the card, each sector has own keys (Key A, Key B).Two different keys for each sector support systems using key hierarchies, so RF08S offers real multi-application functionality.

RF08S's security and anti-crack ability have been enhanced by fixing the weak points in the realization of the algorithm without losing of the compatibility. There is no difference in using method of RF08S and RF08.

3 Characteristics

3.1 Limiting values

Symbol	Parameter	Conditions	Min	Max	Unit
T _{stg}	storage temperature	-	-55	+125	°C
I _I	input current (IN1 to IN2)	IN1 to IN2; RMS	-	30	mA
V _{ESD}	ESD (HBM) 【3】	-	4	-	KV

Table 3-1 RF08S Limiting values 【1】 【2】

【1】: Stresses above one or more of the limiting values may cause permanent damage to the device.

【2】: This product includes circuitry specifically designed for the protection of its internal devices from the damaging effects of excessive static charge. Nonetheless, it is suggested that conventional precautions be taken to avoid applying greater than the rated maxima.

【3】: Human body model: C = 100 pF, R = 1.5 k. For ESD measurement, the IC was mounted in a CDIP8 package.

3.2 Normal Working Condition

Symbol	Parameter	Min	Typ	Max	Unit
T _A	Temperature	-40	+25	+85	°C
H _A	Operation Field strength	1.5		7.5	A/M

Table 3-2 RF08S normal working condition

3.3 Electrical characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
f _i	input frequency	【1】	13.553	13.56	13.567	MHz
C _i	input capacitance	Between IN1 and IN2 【2】	13	15	17	pF

Table 3-3 Electrical characteristics

【1】 Bandwidth limitation (± 7 kHz) according to ISM band regulations.

【2】 Measured with Agilent E5061B at 13.56 MHz and 0.707V RMS.

3.4 EEPROM characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
t _{ret}	retention time	T _{amb} = 55°C	10			year
N _{Endu(W)}	write endurance	T _{amb} = 25°C	200,000			cycle

Table 3-4 EEPROM characteristics



4 Ordering information

Type Number	Wafer Type	Description
FM11RF08S-WTB2	Bump Sawn Wafer	12 inch bump wafer (sawn, laser diced; 120 um thickness, without UV exposure, on film frame carrier; electronic fail die marking according to SECSII format)
FM11RF08S-WTS5	Sawn Wafer	12 inch wafer (sawn, laser diced; 150 um thickness, on film frame carrier; electronic fail die marking according to SECSII format)

FM 11RF 08 -S XXX

Company Name

FM=Shanghai Fudan Microelectronics Group Company Limited

Product Family Name

11RF= High frequency chip based on ISO/IEC 14443

Memory

08= 8k bits EEPROM

Version

S: Security enhanced

Wafer Type

WTS= Sawn Wafer

WTB= Bump Wafer



Revision history

Rev	Release date	Pages	Modifications
preliminary	Apr. 2020	18	
1.0	Sep.2020	18	1. update the sales information in the last page 2. update ordering information

Sales and Service

Shanghai Fudan Microelectronics Group Co., Ltd.
Address: Bldg No. 4, 127 Guotai Rd, Shanghai City China.
Postcode: 200433
Tel: (86-021) 6565 5050 Fax: (86-021) 6565 9115

Shanghai Fudan Microelectronics (HK) Co., Ltd.
Address: Unit 506, 5/F., East Ocean Centre, 98 Granville Road, Tsimshatsui East, Kowloon, Hong Kong
Tel: (852) 2116 3288 2116 3338
Fax: (852) 2116 0882

Beijing Office
Address: Room 423, Bldg B, Gehua Building, 1 QingLong Hutong, Dongzhimen Alley north Street, Dongcheng District, Beijing City, China.
Postcode: 100007
Tel: (86-010) 8418 6608
Fax: (86-010) 8418 6211

Shenzhen Office
Address: Room.2306-2308, Building A7, Chuangzhi Cloud City, Liuxian Avenue, Xili Street, Nanshan District, Shenzhen, China.
Postcode: 518000
Tel: (86-0755) 8335 0911 8335 1011 8335 2011 8335 0611
Fax: (86-0755) 8335 9011

Shanghai Fudan Microelectronics (HK) Ltd Taiwan Representative Office
Address: Unit 1225, 12F., No 252, Sec.1 Neihu Rd., Neihu Dist., Taipei City 114, Taiwan
Tel : (886-2) 7721 1889
Fax: (886-2) 7722 3888

Shanghai Fudan Microelectronics (HK) Ltd Singapore Representative Office
Address : 47 Kallang Pudding Road, #08-06,The Crescent @ Kallang ,Singapore 349318
Tel : (65) 6443 0860
Fax: (65) 6443 1215

Fudan Microelectronics (USA) Inc.
Address : 97 E Brokaw Road, Suite 320, San Jose, CA 95112
Tel : (+1)408-335-6936

Web Site: <http://www.fmsh.com/>